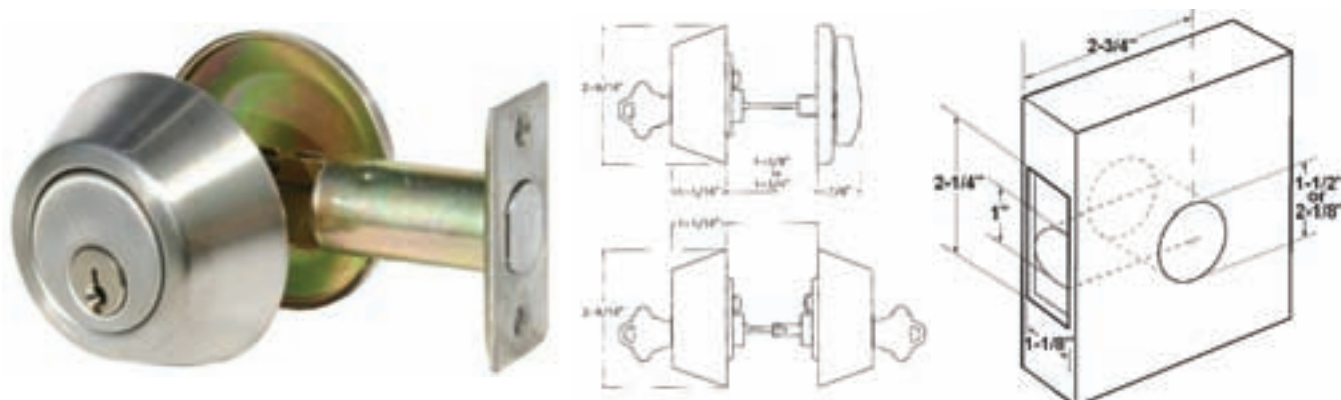


DB-200**LOCKSETS****GRADE 2****SOLID BRASS COMMERCIAL STANDARD DUTY DEADBOLTS****FEATURES**


- Deadbolt has Hardened Steel Inserts for Saw Resistance.
- Full 1" Throw Deadbolt.
- Adjustable Backset, 2-3/8" or 2-3/4"
- **PDB-S** - 1-1/8" x 2-3/4" Deadbolt Strike.
- Schlage "C" 6 Pin Keyway Standard.
- 1/4" Heavy Gauge Thru-Bolts.

OPTIONS

- **IC** - Best Type Figure 8 Interchangeable Housing. Interchangeable Core *NOT* included. See Cylinder Section.
- **PDB-AR** - 2-3/4" Diameter Adaptor Ring.

Deadbolt Bolt

- **PDB-ADJ** Adjustable Bolt Only

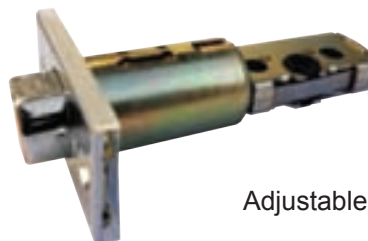



**DB-ADJ**

Adjustable 2-2/8" - 2-3/4" Bolt Only

DB Series Stocked Finishes**DB200 series US3, 10B 32D*****Note:** DB251 also stocked 26D**SPECIFICATIONS**

Deadbolt - Heavy duty grade 2, tubular deadbolt lock shall be by **TA** model number DB200 series. Deadbolt shall be non-handed, reversible and made from solid brass. The bolt shall be made with hardened steel insert for saw resistant and have 1" projection.

1 YEAR WARRANTY**FUNCTIONS**

<p>DB251 - Single Cylinder</p>  <p>-Deadbolt thrown or retracted by key from outside or by turning inside turn.</p> <p>-Bolt automatically deadlocks when fully thrown.</p>	<p>DB260 - Double Cylinder</p>  <p>-Deadbolt thrown or retracted by key from either side.</p> <p>-Bolt automatically deadlocks when fully thrown.</p>
<p>DB280 - Door Bolt</p>  <p>-Deadbolt thrown or retracted by turn only.</p> <p>-No through holes in door. Designed for half door preparation.</p> <p>-Half bore is 1-5/8" (Do not bore through)</p>	<p>DB290 - Bolt & Plate</p>  <p>-Deadbolt thrown or retracted by turn only.</p> <p>-Outside plate covers and mounts over standard deadbolt door Preparation.</p>



DOOR HARDWARE
www.tahardware.com