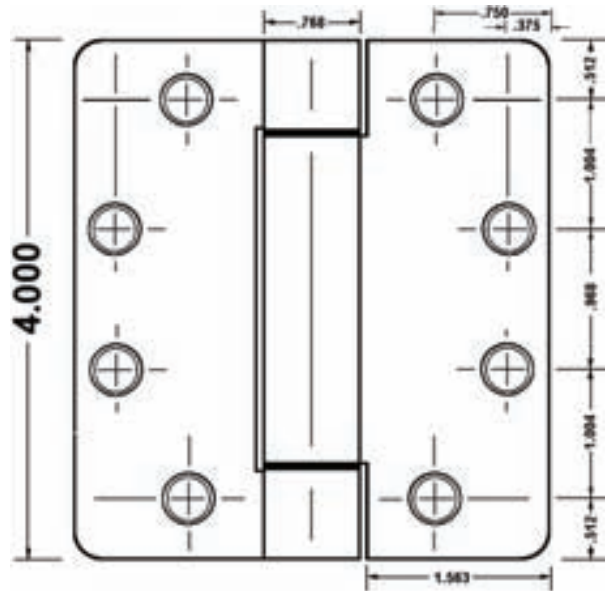


1/4" RADIUS CORNER COMMERCIAL WEIGHT SPRING HINGE**4 x 4****FEATURES**

- Full Mortise, 1/4" Radius Corner, Spring Hinges Steel Hinge.
- UL Listed
- Material Gauge - .134
- Adjustable Spring Tension
- Screw packages - 1/2 Machine Screws (1/2MS) and
- All Wood Screws (AWS).
- Machine screws - Phillips(#1) Flat-head -12 x 24 x 1/2"
- Wood Screws - Phillips(#1) Flat-head -12 x 1-1/4"

SPECIFICATIONS

Spring Hinges – Spring hinges shall be by TA model number DHRCSP179. Hinges to be provided in the type and size as recommended by the Manufacturer. All hinges to be with adjustable spring tension with non-removable pins as listed in hardware groupings and shall be provided with the width that will clear trim to allow for maximum degree of swing.

- For Doors under 70 lbs. and not exceeding 3' x7' x 1-3/4" = 1 each DHRCSP179 and 2 each DHBB179
- For Doors up to 160 lbs. = 3 each DHRCSP179

CODE COMPLIANCE

- ANSI Type A8107-1/4"(DHRCSP179)
- Meets USA Federal Spec. #FF-H-116C
- C-UBC – California Uniform Builders Code -2001
- NFPA 80- National Fire Protection Association -1999
- NFPA 101-National Fire Protection -Life Safety- 2000

1 YEAR WARRANTY**PACKAGING INFORMATION**

- 3 Hinges per BOX and 48 per Carton.